


## FINISHING YOUR WALL QUILT:

1. Sandwich your quilt with your choice of batt. Either hand quilt or machine quilt it in a pleasing fashion of your choice. Bind your wall quilt and you are finished! (See Diagram E)

Finished Size 17"x 17"

Diagram E

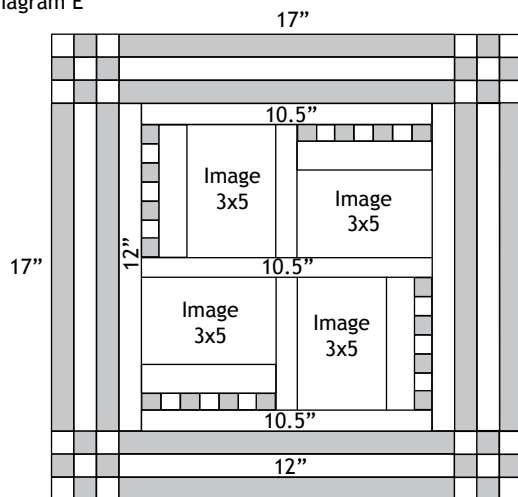

See our website for a PDF File of pattern.

### CARE INSTRUCTIONS:

Colorfast for hand washing:  
Use cold water and mild (neutral PH) detergent; an example of a neutral PH detergent would be Ivory, air dry.

## VINTAGE IMAGE CATEGORIES ON WEB SITE:

- National Parks - 50 Different Parks
- Vintage Sewing and Quilting Collection
- Antique Home and Garden Collection
- Household - Cooking and Kitchens
- Gardening - Vegetables and Flowers
- Canning Labels - Fruits and Vegetables
- Antique Flower Alphabet by Catherine Klein
- Cowgirls and Cowboys / Horses / Cows
- Santas / Christmas / Angels / Halloween
- Thanksgiving / Easter / Patriotic / Valentines
- Fairies - Cicely Barker, Outhwaite, Cloke
- Children - Jessie Willcox Smith and others
- State and Local Views / Railroads
- Agriculture / Farms / Chickens / Rabbits / Cats
- Sports - Fishing, Skiing, Golf, Football
- Civil War Sesquicentennial / Revolutionary War
- Girl and Boy Scouts, Campfire Girls Centennial
- Camping / Canoeing / Hiking / Birds

## OLDE AMERICA ANTIQUES

To view more vintage images go to our web site:

**www.OldeAmericaAntiques.com**

**Email:** susandavis@oldeamericaantiques.com

Bozeman, MT 59715 • 406-587-0937

© 2015 Olde America Antiques - All Rights Reserved

# OLDE AMERICA ANTIQUES

## Nine-Patch Quilt Pattern Quilted Wall Hanging Using 3"x 5" Quilt Blocks

Finished Size 17"x 17"



### GENERAL INFORMATION:

- Creator assumes the user has basic sewing and quilting knowledge.
- Adjust subcut strip lengths as needed for personal measurements.
- All seams are 1/4 inch.

### FABRIC REQUIREMENTS:

- 1/4 Yard Light Fabric
- 1/3 Yard Dark Fabric (includes binding)
- 1/2 Yard Backing Fabric

### ADDITIONAL SUPPLIES NEEDED:

- Sewing Machine in good working order and new needle
- Rotary cutting tools, mat, ruler, cutter
- Scissors
- Straight Pins
- Sewing Machine Thread

## CUTTING DIRECTIONS:

**LIGHT FABRIC:** Cut 1 strip (selvage to selvage) 1 3/4" x 44"  
 Subcut into 4 - 1 3/4" x 5 1/2" pieces (spacers)  
 Cut 5 strips (selvage to selvage) 1 1/4" x 44"  
 Subcut 1 strip: 2 - 5 1/2" pieces (sashing)  
 2 - 12 1/2" pieces (sashing)  
 1 strip: 3 - 11" pieces (sashing)  
 Remaining 3 strips will be used in full length strip sets.



**DARK FABRIC:** Cut 4 strips (selvage to selvage) 1 1/4" x 44"  
 Cut 2 strips for 75" continuous binding  
 (strip width is personal preference)

## PREPARE AND SET ASIDE:

Using full strip lengths, make 1 strip set of dark-light-dark.  
 (Uses 2 dark strips & 1 light strip) Subcut strip set into 3 - 12 1/2"  
 border sections and 4 - 1 1/4" units for use in 9-patch corners.

Cut last 2 light strips in 4 - 22" pieces and last 2 dark strips in  
 4 - 22" pieces. Make a dark-light-dark strip set. Subcut into 1 -  
 12 1/2" border section and 4 - 1 1/4" units for checkerboards.  
 Make a light-dark-light strip set. Subcut into 8 - 1 1/4" units for  
 9-patch corners. To the remainder of the strip set, sew an  
 additional dark strip using a generous 1/4" seam allowance.  
 Subcut 4 - 1 1/4" units for checkerboards. (See Diagram B)

Diagram B

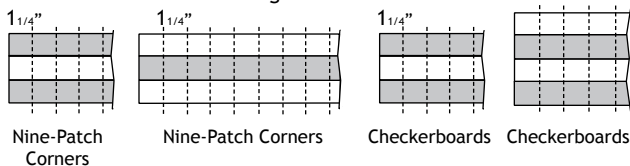

## ASSEMBLY: (See Diagram A)

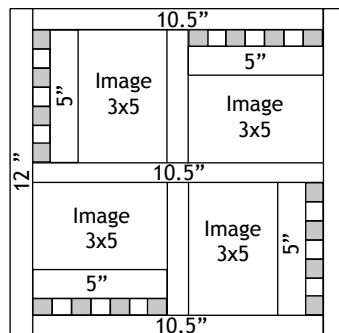


Diagram A

- Carefully peel away the backing from your printed images. Trim the white border to 1/4" from the edge of the image on all 4 sides, this is your seam allowance.
- Create 4 checkerboard strips using a light-dark-light-dark unit and a dark-light-dark unit sewn end to end (Adjust seam allowances if necessary to be 5 1/2" finished). Sew this unit to a 5 1/2" spacer strip. Press. (See Diagram B - 1)
- Add one of these units to each vintage image. See diagram A for placement. Press.
- Sew top 2 images together (1 horizontal & 1 vertical) using a 5 1/2" sashing strip. Repeat for bottom 2 images. Press.
- Take your 2 image pieces and add an 11" sashing piece between them. Add another 11" sashing piece to top and bottom. Next, add 12 1/2" sashing piece to both sides. Be sure to press as you go. (See Diagram A)

## PIECED 9-PATCH CORNERS FOR THE BORDER:

- Using the previously cut 1 1/4" dark-light-dark and light-dark-light units, sew the 9 patch corner units as shown in Diagram C.



Diagram C

## ASSEMBLING THE BORDERS:

(See Diagram E on back pg.)

- Sew the 2 - 12 1/2" dark-light-dark units previously cut to the sides of the body of your wall quilt. (Diagram D) Press with iron.
- Sew the 9 patch corner block units (Diagram C) to each end of the other 2 - 12 1/2" dark-light-dark units. (Diagram D-1) Sew these border sections to top and bottom of your wall quilt matching up the side borders with the 9 patches.




Diagram D




Diagram D-1