


Nine-Patch Quilt Pattern Quilted Wall Hanging

Finished Size 21" x 21"

21"

Diagram E

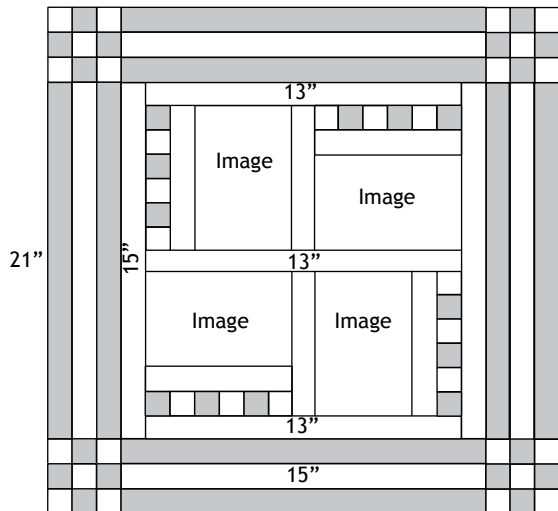

See our website
for a PDF File
image of this
pattern.

CARE INSTRUCTIONS:

Colorfast for hand washing:

Use cold water and mild (neutral PH) detergent;
an example of a neutral PH detergent would be Ivory, air dry.

Olde America Antiques American Quilt Blocks

To view more than 5,000 quilt blocks go to our web sites:

www.OldeAmericaAntiques.com

www.AmericanQuiltBlocks.com

Email: wonderland@montana.com • Tel: 406-587-0937

© 2006-2015 Olde America Antiques - All Rights Reserved



Nine-Patch Quilt Pattern Quilted Wall Hanging

Finished Size 21" x 21"



GENERAL INFORMATION:

Creator assumes the user has
basic sewing & quilting knowledge.

Adjust subcut strip lengths as
needed for personal measurements.

All seams are 1/4 inch.

FABRIC REQUIREMENTS:

1/3 Yard Light Fabric

1/2 Yard Dark Fabric

(includes binding)

3/4 Yard Backing Fabric

ADDITIONAL SUPPLIES NEEDED:

Sewing Machine in good working
order & new needle

Rotary cutting tools, mat, ruler,
cutter

Scissors

Straight Pins

Sewing Machine Thread

CUTTING DIRECTIONS:

LIGHT FABRIC: Cut 6 strips (selvage to selvage) 1 1/2" x 44"
 Subcut 1 strip: 6 - 6 1/2" pieces (sashing)
 1 strip: 3 - 13 1/2" pieces (sashing)
 1 strip: 2 - 15 1/2" pieces (sashing)
 Remaining 3 strips will be used in full length strip sets.

DARK FABRIC: Cut 5 strips (selvage to selvage) 1 1/2" x 44"
 Cut 3 strips for 90" continuous binding
 (strip width is personal preference)

PREPARE AND SET ASIDE:

Using full strip lengths, make 2 strip sets of dark-light-dark. (Uses 4 dark strips & 2 light strips) From each set cut 4 - 1 1/2" units (total of 8) for use in checkerboard and 9 patch corners. Cut remainder of strip sets in 2 - 15 1/2" border sections (total of 4).

Cut last light strip in 2 - 22" pieces and last dark strip in 1 - 22" piece. Make a light-dark-light strip set 22" long. Subcut into 12 - 1 1/2" units for use in checkerboards and 9-patch corners. (See Diagram B)




Diagram B




Diagram B-1


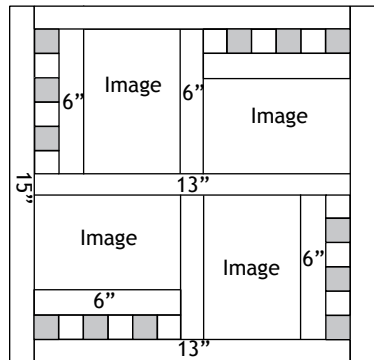


Diagram A

ASSEMBLY: (See Diagram A)

- Carefully peel away the backing from your printed images. Trim the white border to 1/4" from the edge of the image on all 4 sides, this is your seam allowance.
- Create 4 checkerboard strips using a dark-light-dark unit and a light-dark-light unit sewn end to end (6 1/2" finished). Sew this unit to a 6 1/2" sashing strip. Press. (See Diagram B - 1)
- Add one of these units to each image. See diagram A for placement. Press.



- Sew top 2 images together (1 horizontal & 1 vertical) using a 6 1/2" sashing strip. Repeat for bottom 2 images. Press.
- Take your 2 image pieces and add a 13 1/2" sashing piece between them. Add another 13 1/2" sashing piece to top and bottom. Next, add 15 1/2" sashing piece to both sides. Be sure to press as you go. (See Diagram A)

PIECED 9-PATCH CORNERS FOR THE BORDER:

- Using the previously cut 1 1/2" dark-light-dark and light-dark-light units, sew the 9 patch corner units as shown in Diagram C.



Diagram C

ASSEMBLING THE BORDERS: (See Diagram E on back pg.)

- Sew the 2 - 15 1/2" dark-light-dark units previously cut to the sides of the body of your wall quilt. Press with iron.
- Sew the 9 patch corner block units (Diagram C) to each end of the other 2 - 15 1/2" dark-light-dark units. (Diagram D-1) Sew them to top and bottom of your wall quilt, matching up the strips with the 9 patches. Press with iron. (See Diagram D)




Diagram D - 1




Diagram D

FINISHING YOUR WALL QUILT:

- Sandwich your quilt with your choice of batt. Either hand quilt or machine quilt it in a pleasing fashion of your choice. Bind your wall quilt and you are finished! (See Diagram E on back)

