




Nine-Patch Quilt Pattern Quilted Wall Hanging

Finished Size 19" x 19"

19"

Diagram E

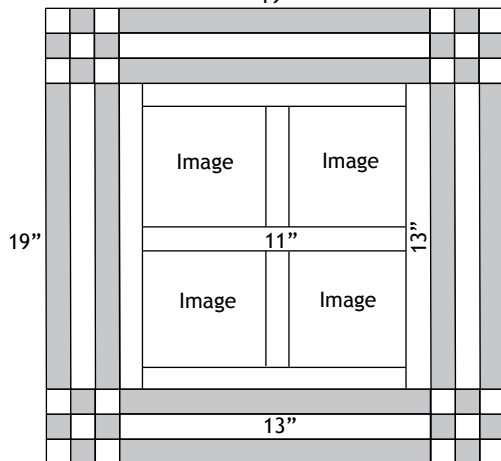

See our website
for a PDF File
image of this
pattern.

CARE INSTRUCTIONS: (as needed)

- Colorfast for hand washing: Use cold water and mild (neutral PH) detergent; an example of a neutral PH detergent would be Ivory
- Air dry

Olde America Antiques

To view more than 5,000 vintage images go to our

Web Site: www.OldeAmericaAntiques.com

Email: susandavis@oldeamericaantiques.com

Bozeman, MT 59715 • 406-587-0937

© 2015 Olde America Antiques - All Rights Reserved



Olde America Antiques

GS-3

Nine-Patch Quilt Pattern Quilted Wall Hanging

Finished Size 19" x 19"



- Creator assumes the user has basic sewing and quilting knowledge.
- All seams are 1/4 inch.
- Adjust subcut strip lengths as needed for personal measurements.

FABRIC REQUIREMENTS:

1/4 Yard Light Fabric

1/3 Yard Dark Fabric (includes binding)

2/3 Yard Backing Fabric

ADDITIONAL SUPPLIES NEEDED:

Sewing Machine in good working order and new needle

Rotary cutting tools, mat, ruler, cutter

Scissors, Straight Pins, Sewing Machine Thread

CUTTING DIRECTIONS:

LIGHT FABRIC: Cut 5 strips (selvage to selvage) 1 1/2" x 44"

Subcut - 1 strip: 2 - 5 1/2" and 2 - 13 1/2" pieces (sashing)

1 strip: 3 - 11 1/2" pieces (sashing)

1 strip: 3 - 13 1/2" pieces (borders)

1 strip: 1 - 13 1/2" pieces (borders)

1 strip: 3 - 13" pieces (9-patch corners)




CUTTING DIRECTIONS (continued):

DARK FABRIC: Cut 4 strips (selvage to selvage) 1 1/2" x 44"

- Subcut -
- 1 strip: 3 - 13 1/2" pieces (borders)
 - 1 strip: 3 - 13 1/2" pieces (borders)
 - 1 strip: 3 - 13" pieces (9-patch corners)
 - 1 strip: 2 - 13 1/2" pieces (borders)

Cut 2 strips for 80" continuous binding (strip width is personal preference)

Diagram A



ASSEMBLY: (See Diagram A)

- Carefully peel away the backing from your printed images. Trim the white border to 1/4" from the edge of the image on all 4 sides, this is your seam allowance.
- Start with 2 images and add a 6 1/2" sashing strip between them. Repeat this with the other 2 images. Press with iron.
- Take your 2 image pieces and add a 9 1/2" sashing piece between them, then add another 9 1/2" sashing piece on top and bottom of this unit. Next add a 15 1/2" sashing piece to the sides of the body of your wall quilt. Be sure to press with iron as you go.

PIECED 9-PATCH CORNERS FOR THE BORDER:

- With your 13" strips of light and dark, sew one unit with dark-light-dark and another with light-dark-light as shown in diagram. Press all seams to the dark fabric. (See Diagram B)





Diagram B



- From the dark-light-dark unit, cut 4 - 1 1/2" pieces across the strips as shown in diagram. Do the same with the second unit (light-dark-light) except cut 8 pieces.
- Sew your corner units (9 patches) as shown in  Diagram C, make 4 like this and press with iron.

ASSEMBLING THE BORDERS: (See Diagram D)

- Take your 8 dark 13 1/2" pieces and 4 light 13 1/2" pieces and sew them together in 4 units, dark-light-dark, these are your four side borders.
- Press to the dark fabric.
- Sew 2 border units to the sides of the body of your wall quilt. Press with iron.
- Sew one 9 patch corner block to each end of the other 2 border units. These are your top and bottom borders, sew them to your wall quilt matching up the strips with the 9 patches. Press with iron.

(See Diagram D)




Diagram D

FINISHING YOUR WALL QUILT:

- Sandwich your quilt with your choice of batt. Either hand quilt or machine quilt it in a pleasing fashion of your choice. Bind your wall quilt and you are finished! (See Diagram E on back)

